

Magnetic UHF Metal Tag




Functional Specifications:

RFID Protocol:	EPC Class1 Gen2, ISO18000-6C
Frequency:	(US) 902-928MHz, (EU) 865-868MHz
IC type:	Alien Higgs-3
Memory:	EPC 96bits (Up to 480bits) , USER 512bits, TID64bits
Write Cycles:	100,000times
Functionality:	Read/write
Data Retention:	Up to 50 Years
Applicable Surface:	Metal Surfaces
Read Range : (Fix Reader)	Up to 10.8M - (US) 902-928MHz, on metal Up to 10.5M - (EU) 865-868MHz, on metal
Read Range : (Handheld Reader)	Up to 6.5M - (US) 902-928MHz, on metal Up to 6.3M - (EU) 865-868MHz, on metal
Warranty:	1 Year


Physical Specification:

Size:	90x20mm, (Hole: D3mm)
Thickness:	5.0mm
Material:	FR4 (PCB)
Colour:	Black (Red, Blue, Green, White)
Mounting Methods:	Magnet
Magnetic Field	≥580 Gauss
Weight:	26.0g


Dimensions:

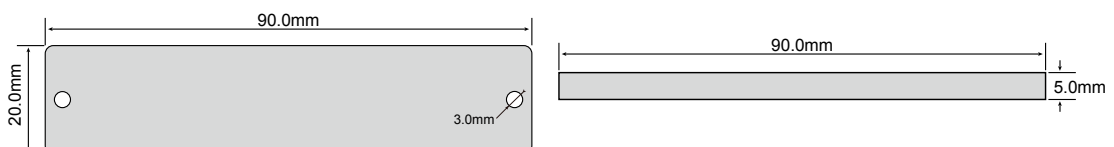

PCB9020MU:

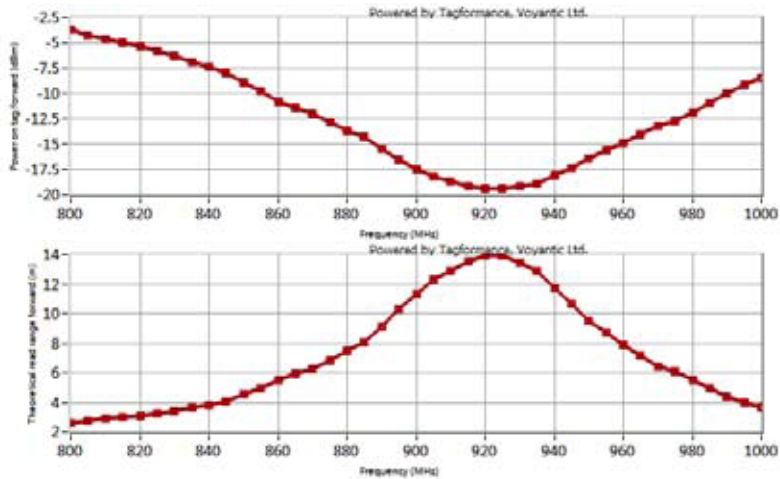

PCB9020ME:

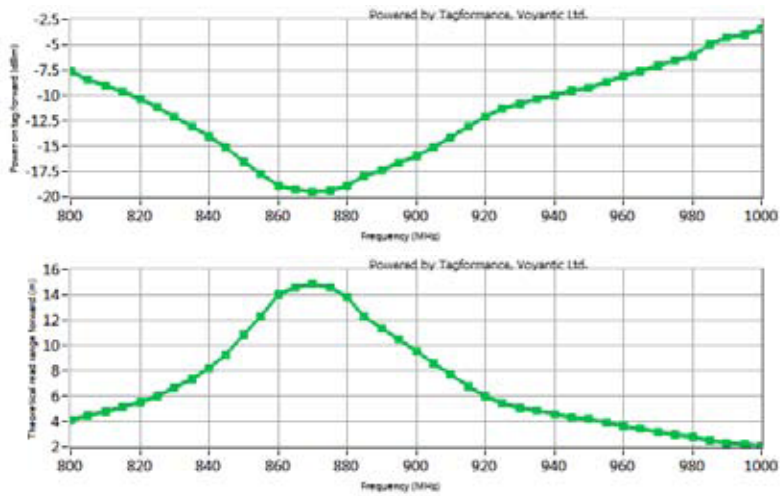

Environmental Specification:

IP Rating:	IP68
Storage Temperature:	-30°C to +75°C
Operation Temperature:	-30°C to +75°C
Certifications:	Reach Approved, RoHS Approved, CE Approved

Order information:

PCB9020MU:	(US) 902-928MHz,
PCB9020ME:	(EU) 865-868MHz