

UHF Metal Tag Everest Series:




Functional Specifications:


RFID Protocol:	EPC Class1 Gen2, ISO18000-6C
Frequency:	(US) 902-928MHz, (EU) 865-868MHz
IC type:	Impinj Monza 4QT
Memory:	EPC 128bits , USER 512bits, TID64bits
Write Cycles:	100,000times
Functionality:	Read/write
Data Retention:	Up to 50 Years
Applicable Surface:	Metal Surfaces
Read Range :	8.0M - (US) 902-928MHz, on metal
(Fix Reader:ThingMagic FU-M6-E, 30dBm)	8.2M - (EU) 865-868MHz, on metal
Read Range :	3.5M - (US) 902-928MHz, on metal
(Handheld Reader: Moto 310, 30dBm)	3.6M - (EU) 865-868MHz, on metal
Warranty:	1 Year

Physical Specification:


Size:	52x13mm, (Hole: D3mm)
Thickness:	3.5mm
Material:	FR4 (PCB)
Colour:	Black (Red, Blue, Green, White)
Mounting Methods:	Adhesive, Screw
Weight:	5.5g

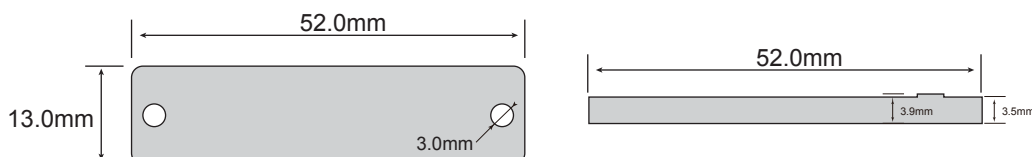

OPP5213U2:

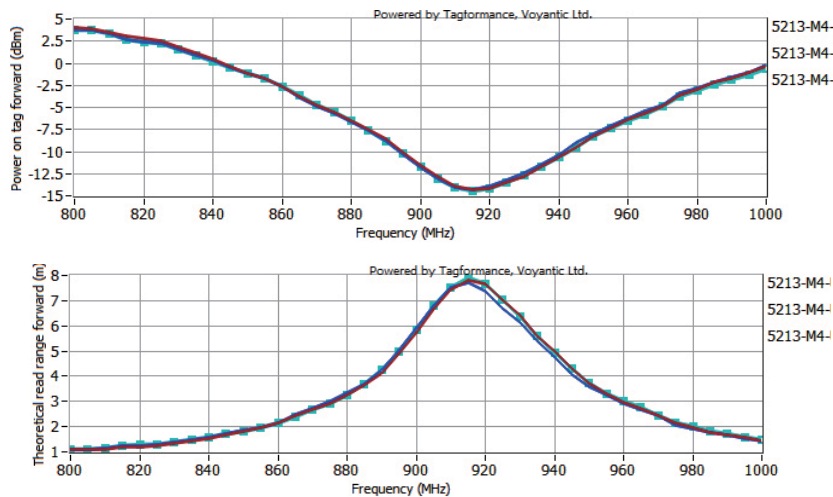

OPP5213E1:

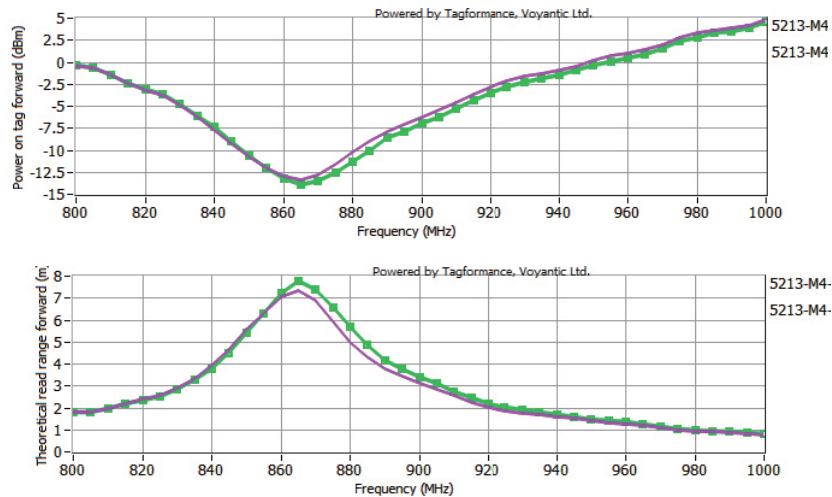

Environmental Specification:

IP Rating:	IP68
Storage Temperature:	-40°C to +150°C
Operation Temperature:	-40°C to +100°C
Certifications:	Reach Approved, RoHS Approved, CE Approved

Order information:

OPP5213U2	(US) 902-928MHz,
OPP5213E1	(EU) 865-868MHz